


Horizontal Sliding Window

Configurations

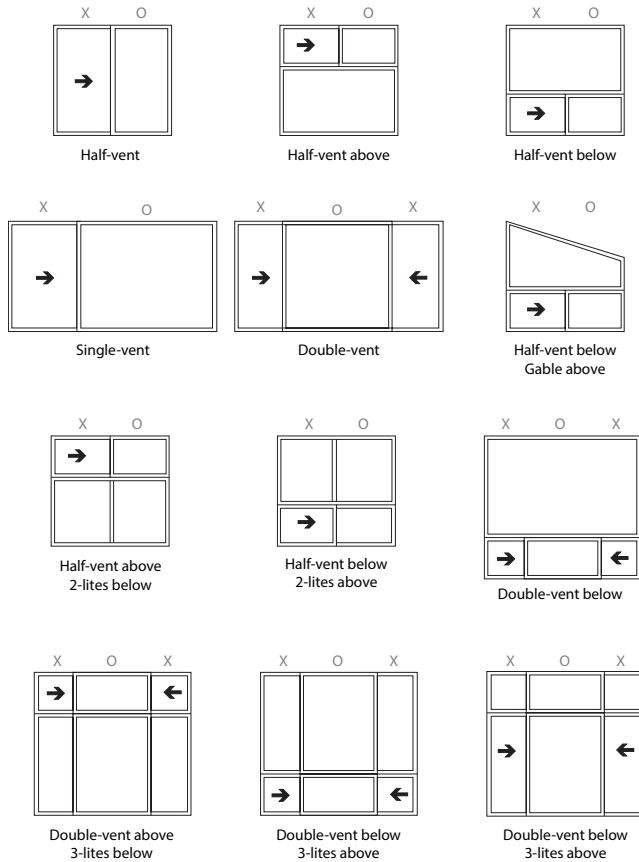

Minimum/Maximum Sizes

Half Vent

- Min 2⁰¹° Max 6⁰⁶°

Half Vent above

- Min 2⁰²° Max 6⁰⁶°

Half Vent below

- Min 2⁰²° Max 6⁰⁶°

Single Vent

- Min 2⁰¹° Max 8⁰⁶°

Double Vent

- Min 3⁰¹° Max 10⁰⁶°

Double Vent below

- Min 4⁰²° Max 8⁰⁶°

Double Vent above

- Min 4⁰²° Max 8⁰⁶°

Minimum egress for half-vent is 4⁰³°.

Minimum egress for double-vent is 6⁰³° with a 24" vent.

Available Frame Styles

- 1-3/8" Fin Setback
- 1" Fin Setback with J-channel
- 1" Fin Setback with Stucco Key
- 1-1/2" Contour Z-bar
- 1-1/2" Flat Z-bar
- Block Frame (no fin)

NOTE: For engineering approval contact your Milgard representative for any configuration over 40 square feet. Each Milgard Manufacturing plant reserves the right to alter or change sizes and configurations according to location capabilities. Ask your Milgard rep about specialty applications. Windows over 40 square feet shipped open for field glazing. Varies by location.

Not all frame styles available at all Milgard locations. Contact your Milgard Representative for more information.